






PRO Overseas

LED LIGHTING PRO

About us

Certificate of honor



Energy saving certification



CQC



soft



Design patent



Utility model



Patent for invention



50,000 hours of certification report



High and low temperature test report



Light efficiency test report



IP68 test report




Double 85 test report





UV Aging Report

NENGXING



Model	NENGXING				
Power	shuori 60-70W	80-90W	100-110W	120-130W	140-150W
Electric cell	12.8V 28AH/32AH	2.8V 36AH/40AH	12.8V 44AH/48AH	12.8V 52AH/56AH	12.8V 60AH/64AH
controller	shuori MPPT 30W/10A	shuori MPPT 40W 10A	shuori MPPT 50W 10A	shuori MPPT 60W 10A	shuori MPPT 80W 10A
Solar panel	18V 60W/70W monocrystalline silicon	18V 80W/90W monocrystalline silicon	18V 100W/110W monocrystalline silicon	18V 120W/130W monocrystalline silicon	18V 140W/150W monocrystalline silicon
Lighting time	6-12H adjustable	6-12H adjustable	6-12H adjustable	6-12H adjustable	6-12H adjustable
Control mode	Light control + time control	Light control + time control	Light control + time control	Light control + time control	Light control + time control
Color temperature	6000K	6000K	6000K	6000K	6000K
Class of protection	IP65	IP65	IP65	IP65	IP65
Straight diameter	Ø82mm	Ø82mm	Ø82mm	Ø82mm	Ø82mm
Installation height	6-10 M	6-10 M	6-10 M	6-10 M	6-10 M

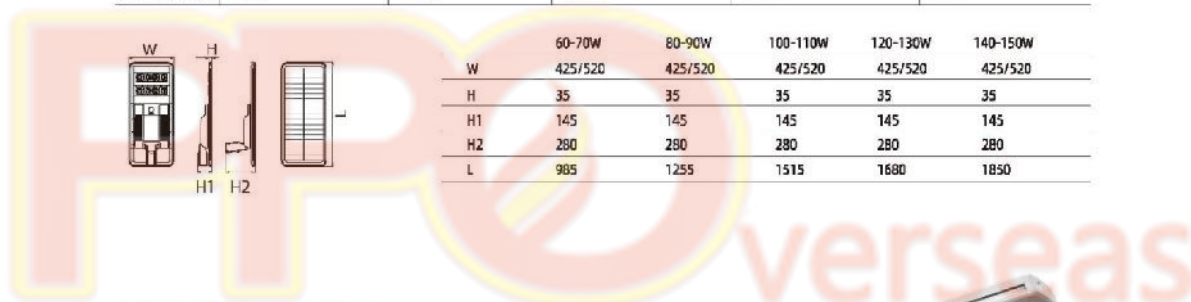


	60-70W	80-90W	100-110W	120-130W	140-150W
W	425/520	425/520	425/520	425/520	425/520
H	35	35	35	35	35
H1	145	145	145	145	145
H2	280	280	280	280	280
L	985	1255	1515	1680	1850

ZHIJIN-series



Model	ZHIJIN-1	ZHIJIN-2	ZHIJIN-3	ZHIJIN-4	ZHIJIN-5
Work rate	60W	80W	100W	120W	140W
Electric cell	12.8V 32AH	12.8V 40AH	12.8V 48AH	12.8V 56AH	12.8V 64AH
controller	shuori MPPT 30W 10A	shuori MPPT 40W 10A	shuori MPPT 50W 10A	shuori MPPT 60W 10A	shuori MPPT 80W 10A
Brush cell	ternary lithium battery, 11.1V 2AH	ternary lithium battery, 11.1V 2AH	ternary lithium battery, 11.1V 2AH	ternary lithium battery, 11.1V 4AH	ternary lithium battery, 11.1V 4AH
Frequency of brushing	1-5 times/day adjustable	1-5 times/day adjustable	1-5 times/day adjustable	1-5 times/day adjustable	1-5 times/day adjustable
Solar panel	monocrystalline silicon 18V 60W	monocrystalline silicon 18V 80W	monocrystalline silicon 18V 100W	monocrystalline silicon 18V 120W	monocrystalline silicon 18V 140W
Charging time	6-8H	6-8H	6-8H	6-8H	6-8H
Lighting time	6-12H adjustable	6-12H adjustable	6-12H adjustable	6-12H adjustable	6-12H adjustable
Control mode	Light control + time control	Light control + time control	Light control + time control	Light control + time control	Light control + time control
Mounting diameter	Ø82*120mm	Ø82*120mm	Ø82*120mm	Ø82*120mm	Ø82*120mm

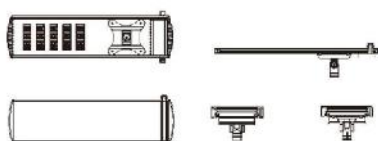

60W	1180x410x310
80W	1305x410x310
100W	1430x410x310
120W	1555x410x310
140W	1680x410x310

Batman



Model	Batman				
Power	60W	80W	100W	120W	140W
Luminaire size	985*835*255mm	1255*835*145mm	1430*835*255mm	1680*835*255mm	1850*835*255mm
Material quality	Die cast aluminum + aluminum alloy	Die cast aluminum + aluminum alloy	Die cast aluminum + aluminum alloy	Die cast aluminum + aluminum alloy	Die cast aluminum + aluminum alloy
Luminaire color	Black sand grain + frosted bright silver	Black sand grain + frosted bright silver	Black sand grain + frosted bright silver	Black sand grain + frosted bright silver	Black sand grain + frosted bright silver
Light source	5054chip, 2M*50P/M	5054chip, 3M*50P/M	5054chip, 4M*50P/M	5054chip, 5M*50P/M	5054chip, 6M*50P/M
Electric cell	12.8V 28AH	12.8V 36AH	12.8V 44AH	12.8V 52AH	12.8V 60AH
controller	shuori MPPT 30W 10A	shuori MPPT 40W 10A	shuori MPPT 50W 10A	shuori MPPT 60W 10A	shuori MPPT 80W 10A
Solar panel	monocrystalline silicon 18V 120W	monocrystalline silicon 18V 160W	monocrystalline silicon 18V 200W	monocrystalline silicon 18V 240W	monocrystalline silicon 18V 280W
Charging time	6-8H	6-8H	6-8H	6-8H	6-8H
Lighting time	6-12H adjustable	6-12H adjustable	6-12H adjustable	6-12H adjustable	6-12H adjustable
Opening mode	push-open	push-open	push-open	push-open	push-open
Control mode	Light control + time control	Light control + time control	Light control + time control	Light control + time control	Light control + time control
Mounting diameter	ø82*120mm	ø82*120mm	ø82*120mm	ø82*120mm	ø82*120mm
Installation mode	Arm lifting/straight rod mounting	Arm lifting/straight rod mounting	Arm lifting/straight rod mounting	Arm lifting/straight rod mounting	Arm lifting/straight rod mounting
Installation height	5-7meter	6-8meter	7-9meter	8-10meter	10-12meter
Class of protection	IP65	IP65	IP65	IP65	IP65

NENGYUE-W




Model	NENGYUE-W
Power	60W
Electric cell	65AH/3.2V
controller	Integrated control panel 20A
Solar panel	60W/6V polycrystalline silicon
Lighting time	6-12H
Control mode	Light control + time control, remote control
Color temperature	6000K
Class of protection	IP65
Straight diameter	Ø76mm
Installation height	5-8 M



NINGYUE-T




Model	NINGYUE-T	
Power	60W	
Electric cell controller	65AH/3.2V	
Solar panel	60W/6V polycrystalline silicon	
Lighting time	6-12H	
Control mode	Light control + time control, remote control	
Color temperature	6000K	
Class of protection	IP65	
Straight diameter	Ø76mm	
Installation height	5-8 M	



GONGSHUOYIHAO



Model	GONGSHUOYIHAO	
Power	30W	
Electric cell controller	ternary lithium battery 8AH	
Solar panel	60W/6V polycrystalline silicon	
Lighting time	6-12H	
Control mode	Light control + body sensing (radar sensing 100%+50%)	
Color temperature	4000K	
Class of protection	IP65	
Straight diameter	Ø60mm	
Installation height	5-8 M	

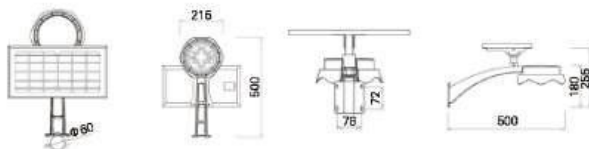

JINGLUN



Model	JINGLUN
Power	144W
Electric cell	24AH/12V, Ternary lithium battery
controller	Remote power, 40W/10A/2.4G
Solar panel	70W/18V polycrystalline silicon
Lighting time	6-12H adjustable, Long standby light
Control mode	Light control + time control
Color temperature	6000K
Class of protection	IP65
Straight diameter	Ø76mm
Installation height	6-10 M



NENGDA-series




Model	NENGDA-SE	NENGDA-1	NENGDA-60W
Power	2*50W	3*50W	3*50W
Electric cell	16AH/7.4V	24AH/7.4V	28AH/12V
controller	Remote power, 20W/15A/2.4G	Remote power, 20W/15A/2.4G	Remote power, 30W/10A/2.4G
Solar panel	30W/12V monocrystalline silicon	50W/12V monocrystalline silicon	60W/18V monocrystalline silicon
Lighting time	6-12H	6-12H	6-12H
Control mode	Light control + time control, with human body sensing	Light control + time control, with human body sensing	Light control + time control
Color temperature	6000K	6000K	6000K
Class of protection	IP65	IP65	IP65
Straight diameter	Ø60mm	Ø60mm	Ø60mm
Installation height	3-6 M	3-8 M	3-8 M



NENGYANG



Model	NENGYANG	
Power	40W*6	
Electric cell	40AH/3.2V	
controller	20W/15A/2.4G	
Solar panel	40W/6v monocrystalline silicon	
Lighting time	6-12H	
Control mode	Light control + time control	
Color temperature	6000K	
Class of protection	IP65	
Straight diameter	Ø76mm	
Installation height	3-6 M	

FANGZHOU




Model	NENGJING	
Material	aluminum diecasting	
Power	30W	
Electric cell	30AH/3.2V	
Core piece	5054	
Solar panel	30W 6V	
Lighting time	6-12H	
Control mode	Light control + time control	
Color temperature	6000K	
Operating temperature	-30~50°C	
Working hours	12 hours a day for 10 rainy days	
life	> 60,000 小时	
Class of protection	IP65	
Luminaire size	650*300*260mm	
Package size	665*250*525mm	



FLEXIBLE PLATE



Model	FLEXIBLE PLATE
Power	120W
Electric cell	40AH/3.2V
controller	20W/15A/2.4G
Solar panel	40W/6V monocrystalline silicon
Lighting time	6-12H
Control mode	Light control + time control
Color temperature	6000K
Working hours	12 hours a day for 10 rainy days
life	> 60,000 hours
Class of protection	IP65



JINGJINGLIANG

LED SOLAR FLOOD LIGHT



Model	JINGJINGLIANG					
Power	15W	30W	40W	60W	80W	
Electric cell	20AH/3.2V	30AH/3.2V	40AH/3.2V	50AH/3.2V	60AH/3.2V	
Solar panel	20W	35W	45W	60W	70W	
Lighting time	6-12H	6-12H	6-12H	6-12H	6-12H	
Control mode	Light control + time control	Light control + time control	Light control + time control	Light control + time control	Light control + time control	
Color temperature	6000K	6000K	6000K	6000K	6000K	
Operating temperature	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C	
Working hours	12 hours a day for 10 rainy days	12 hours a day for 10 rainy days	12 hours a day for 10 rainy days	12 hours a day for 10 rainy days	12 hours a day for 10 rainy days	
life	> 60,000 hours	> 60,000 hours	> 60,000 hours	> 60,000 hours	> 60,000 hours	
Class of protection	IP65	IP65	IP65	IP65	IP65	



Power	Size (AXBXCmm)	Mounting hole spacing(Dmm)
15W	163X185X50	45
30W	204X237X55	60
40W	249X289X55	90
60W	294X330X55	100
80W	376X407X55	140

YANGGUANGYIHAO



Model	YANGGUANGYIHAO	
Power	100W	
Electric cell controller	65AH/3.2V	
Solar panel	Integrated control panel 25A	
Lighting time	60W/6V polycrystalline silicon	
Control mode	6-12H adjustable, long standby lights	
Color temperature	Light control + time control, remote control	
Class of protection	6000K	
Straight diameter	IP65	
Installation height	Ø60mm	
	6-10 M	

YANGGUANGERHAO



Model	YANGGUANGERHAO	
Power	100W	
Electric cell controller	65AH/3.2V	
Solar panel	Integrated control panel 25A	
Lighting time	60W/6V polycrystalline silicon	
Control mode	6-12H adjustable, long standby lights	
Color temperature	Light control + time control, remote control	
Class of protection	6000K	
Straight diameter	IP65	
Installation height	Ø60mm	
	6-10 M	

CHANGXINGZHIGUANG




Model	CHANGXINGZHIGUANG	
Power	40W	
Electric cell controller	10AH/7.4V, Ternary lithium battery	
Solar panel	10A with human sensing	
Lighting time	30W/12V polycrystalline silicon	
Control mode	6-12H adjustable, long standby lights	
Color temperature	Light control + human body sensing	
Class of protection	6000K	
Straight diameter	IP65	
Installation height	Ø50mm	
	6-10 M	

HONGYUNDANGTOU




Model	Power	Size (mm)	CCT	CRI	Light efficiency	IP grade
HONGYUNDANGTOU	30W-180W	L750*W340*H150	3000K/4000k/6000K	Ra≥70	130 Lm/W	IP65
HONGYUNDANGTOU	420W	L1125*W400*H175	3000K/4000k/6000K	Ra≥70	130 Lm/W	IP65

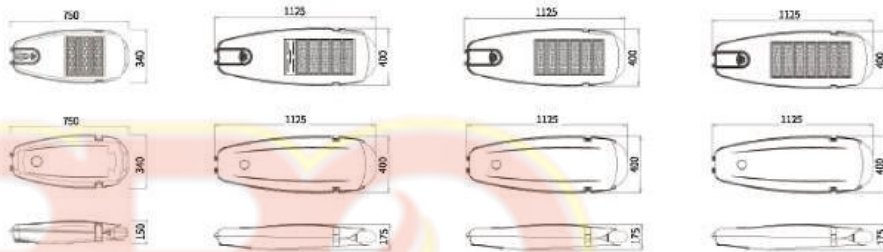


TONGMING




Model	Power	Size (mm)	CCT	CRI	Light efficiency	IP grade
TONGMING	60-80W	L620*W270*H110	3000K/4000k/6000K	Ra≥70	130 Lm/W	IP65
TONGMING	120-150W	L720*W270*H110	3000K/4000k/6000K	Ra≥70	130 Lm/W	IP65
TONGMING	160-200W	L750*W330*H110	3000K/4000k/6000K	Ra≥70	130 Lm/W	IP65
TONGMING	210-360W	L850*W330*H110	3000K/4000k/6000K	Ra≥70	130 Lm/W	IP65

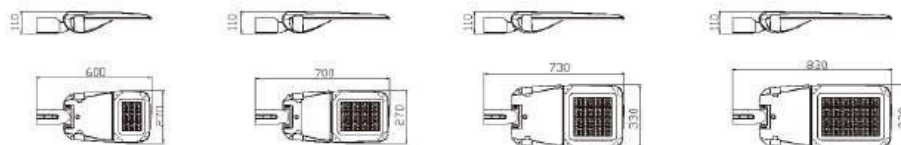

M LINGSHENG




Model	Power	Size (mm)	CCT	CRI	Light efficiency	IP grade
M LINGSHENG	30W-240W	L960*W357*H146	3000K/4000K/6000K	Ra≥70	130 Lm/W	IP65

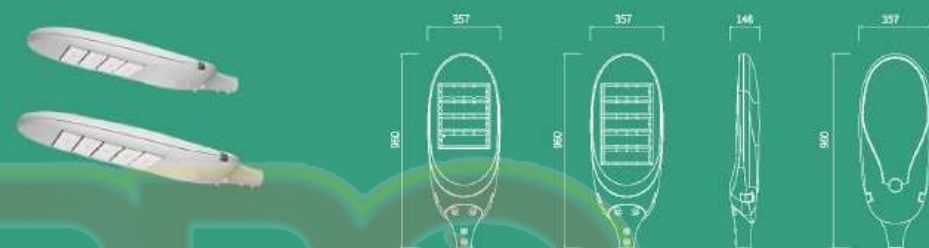

DA V FENGLE




Model	Power	Size (mm)	CCT	CRI	Light efficiency	IP grade
DA V FENGLE (3M)	30W-180W	L615*W330*H90	3000K/4000k/6000K	Ra≥70	130 Lm/W	IP65
DA V FENGLE (5M)	30W-300W	L775*W330*H90	3000K/4000k/6000K	Ra≥70	130 Lm/W	IP65

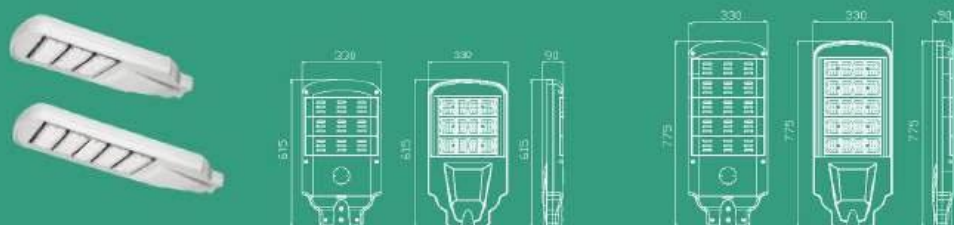

HUAXING C




Model	Power	Size (mm)	CCT	CRI	Light efficiency	IP grade
HUAXING C (3M)	30W-180W	L610*W345*H80	3000K/4000k/6000K	Ra≥70	130 Lm/W	IP65
HUAXING C (5M)	150W-300W	L760*W345*H80	3000K/4000k/6000K	Ra≥70	130 Lm/W	IP65

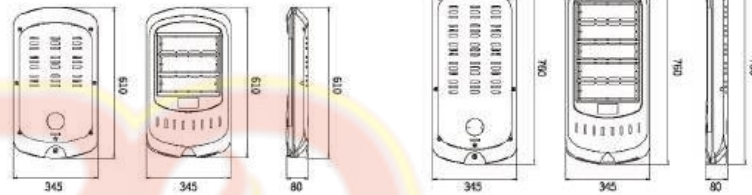



LIFANG



Model	Power	Size (mm)	CCT	CRI	Light efficiency	IP grade
LIFANG (3M)	90W-180W	L720*W335*H160	3000K/4000k/6000K	Ra≥70	130 Lm/W	IP65
LIFANG (5M)	150W-300W	L880*W335*H160	3000K/4000k/6000K	Ra≥70	130 Lm/W	IP65

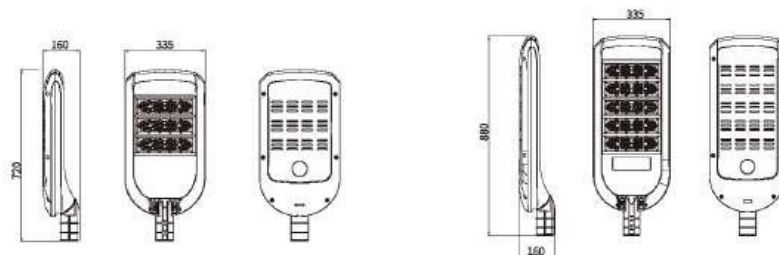


TIANDENG

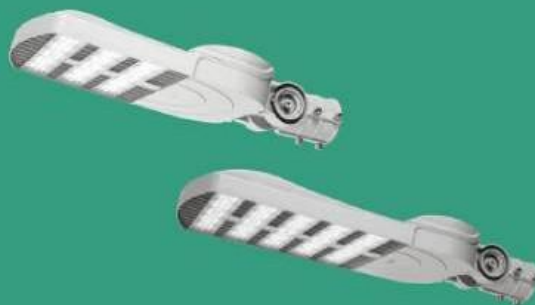

Model	Power	Size (mm)	CCT	CRI	Light efficiency	IP grade
TIANDENG (3M)	144W	L630*W320*H90	3000K/4000k/6000K	Ra≥70	130 Lm/W	IP65
TIANDENG (5M)	240W	L770*W320*H90	3000K/4000k/6000K	Ra≥70	130 Lm/W	IP65

MANYUANCHUNSE



Model	Power	Size (mm)	CCT	CRI	Light efficiency	IP grade
MANYUANCHUNSE (S)	30W-180W	Φ488x705	3000K/4000k/6000K	Ra≥70	130 Lm/W	IP65
MANYUANCHUNSE (L)	30W-300W	Φ660x936	3000K/4000k/6000K	Ra≥70	130 Lm/W	IP65

BAOLI





Model	Power	Size (mm)	CCT	CRI	Light efficiency	IP grade
BAOLI	30W-240W	L780*W320*H160	3000K/4000k/6000K	Ra≥70	130 Lm/W	IP65


M039-L





Model: M039-L
 Size: L298*W73*T25 mm
 Lens size: L238*W73 mm
 Lamp bead model: 5050
 Lamp bead quantity: 28pcs
 Light distribution Angle: 75/150°(Street light distribution)



M039-T30





Model: M039-T30
 Size: L298*W73*T25 mm
 Lens size: L238*W73 mm
 Lamp bead model: 5050
 Lamp bead quantity: 28pcs
 Light distribution Angle: 30°(Floodlight distribution)



M039-T60





Model: M039-T60
 Size: L298*W73*T25 mm
 Lens size: L238*W73 mm
 Lamp bead model: 5050
 Lamp bead quantity: 60pcs
 Light distribution Angle: 60°(Floodlight distribution)



M039-T90





Model: M039-T90
 Size: L298*W73*T25 mm
 Lens size: L238*W73 mm
 Lamp bead model: 5050
 Lamp bead quantity: 60pcs
 Light distribution Angle: 90°(Floodlight distribution)



M042-L (Vertical)





Model: M042-L Vertical
 Size: L300*W75*T35 mm
 Lens size: L245*W75 mm
 Lamp bead model: 3030
 Lamp bead quantity: 64pcs




M042-T25




Model: M042-T25
 Size: L300*W75*T35 mm
 Lens size: L245*W75 mm
 Lamp bead model: 3030
 Lamp bead quantity: 64pcs



M042-T60





Model: M042-T60
 Size: L300*W75*T35 mm
 Lens size: L245*W75 mm
 Lamp bead model: 3030
 Lamp bead quantity: 64pcs



M042-T90





Model: M042-T90
 Size: L300*W75*T35 mm
 Lens size: L245*W75 mm
 Lamp bead model: 3030
 Lamp bead quantity: 64pcs



M042-T120



Model: M042-T120
 Size: L300*W75*T35 mm
 Lens size: L245*W75 mm
 Lamp bead model: 3030
 Lamp bead quantity: 64pcs



**LED LIGHTING
PRODUCTS**

PRO  **verseas**